



Contents

Backpack

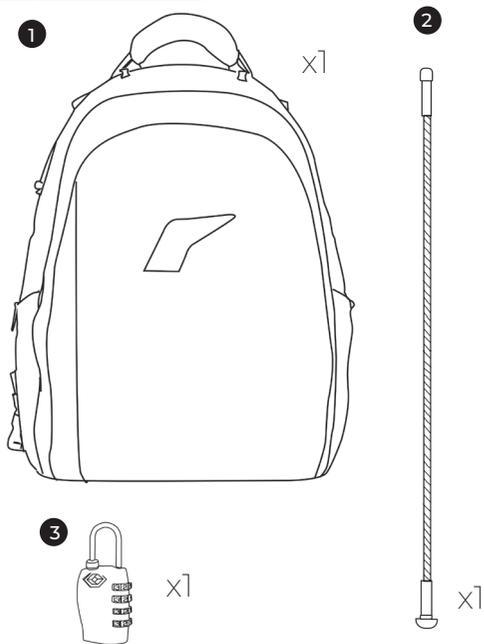

Zipper Cover


For optimum security lock down the zipper cover using the zipper cable and pad lock.

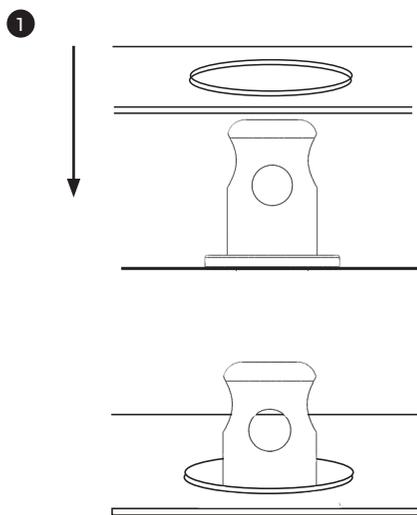


Pull the zipper cover over the zip inserting the pillars into the eyelets

Note

The zipper cable is located in the outside pocket at the back of the backpack

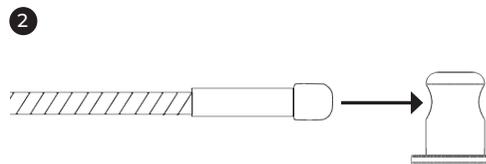


Insert the cable through all four pillars. Feed the cable through the pillar with two holes last.

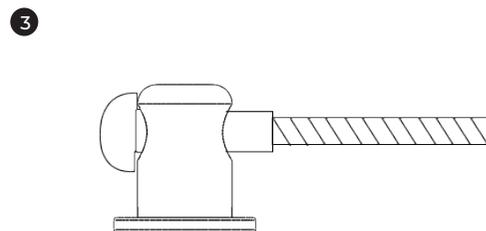

The wider cable swage will stop the cable from coming through all the way

4

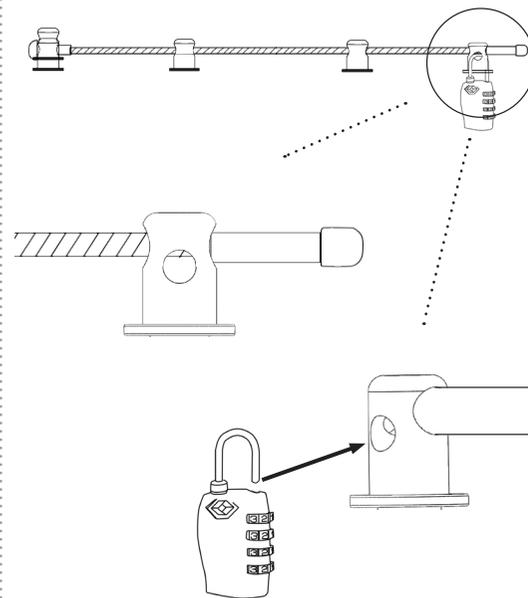

Once the cable has come through all four pillars lock the cover in place at the pillar containing two holes with the four digit combination lock

- 1 Eversafe Backpack
- 2 Zipper Cover Lock Cable
- 3 Zipper Cover TSA Combination Lock

Base Attachment

Remove Backpack Base Feet




- 1 Remove the base feet and 12mm thumbscrews from the bottom of the backpack


Note

Retain feet and thumbscrews for future use

Base Unit (sold separately)

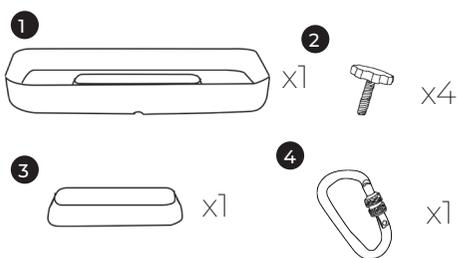

- 1 Safedock Base
- 2 20mm Thumbscrews
- 3 Safedock
- 4 Base Release Clip

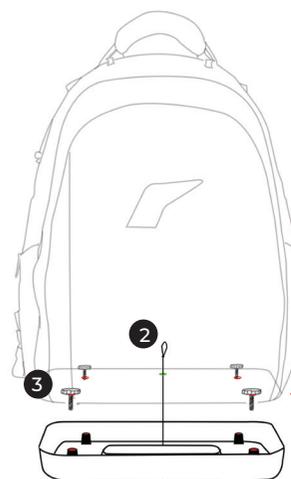

- 2 Feed the base cable through the center hole at the bottom of the backpack
- 3 Place the 25mm thumbscrews through the holes located in the bottom of the bag



- 4 Insert the screws into the holes located in the base and twist to tighten
- 5 Attach the clip to the base release cable

Note

When reattaching the base feet follow steps 3 and 4




EVERSAFE®

Travel | Safe | Eversafe®


Instruction Manual

Reset Pad Lock

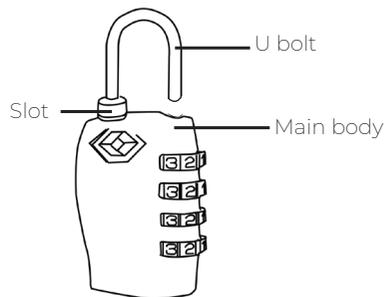

- 1 Open the lock using the code 0000
- 2 Turn the U bolt clockwise. Line up the notch on the U bolt with the slot in the main body and push down
- 3 While keeping the U bolt pressed down set your desired combination
- 4 Release the U bolt, turn it back and lock it into the main body to reset the code

Reset Strap Lock

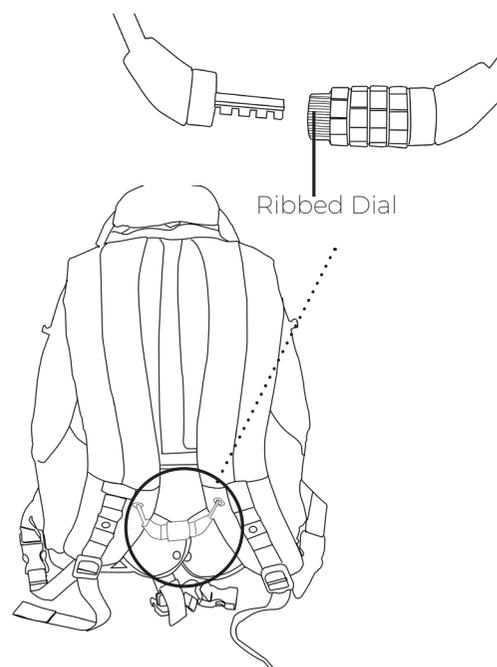

- 1 Open the lock using the code 0000
- 2 Turn the ribbed dial 90 degrees clockwise
- 3 Set your desired combination
- 4 Turn the dial back to reset

Secure


The cable strap can be easily locked to multiple secure fixings, such as,

- Closed leg tables
- Chairs
- Benches
- Poles

Note

Release the strap buckles when extra length is required when securing your backpack

Installing the Safedock



When installing the Safedock use the dock holes as a guide when drilling.

Things you will need

- Drill and drill bits
- Suitable fixings (wood or concrete)

Note

For optimum security it is best to install the Safedock on a level surface

- 1 Drill two pilot holes using the Safedock as a guide marker
- 2 Using the fixings suitable for the surface drill holes and screw your Safedock down

Wood

Fix the Safedock to wooden floors and furniture using standard wood screws (9mm / 3/8 in)

Concrete

Fix to a concrete surface using concrete anchors or screws (9mm / 3/8 in)

Car

When fixing a Safedock to a car we recommend getting the product installed by a professional at a car body shop

Caution

When installing the Safedock ensure there are no pipes, underfloor heating or wires that could get damaged in the process.

Visit the Eversafe website to watch instructional videos on how to install your Safedock

Eversafe Technologies Limited
8 Monaghan Court, Monaghan Street
Newry, Co Down
UK BT35 6BH
Phone UK: +44 7769 552267
Email: info@eversafetech.com

Eversafe Europe Limited
Hamilton House, 28 Fitzwilliam Place
Dublin, Ireland, D02 P283
Phone Ireland: +353 (1) 7759558

Eversafe USA INC
1390, Columbia Ave #257,
Lancaster PA 17603, United States.
Phone USA and Canada:
(617) 763 6360