



EVERSAFE®


Travel | Safe | Eversafe®

Instruction Manual

Hard Case

All Versions


Eurocylinder Key

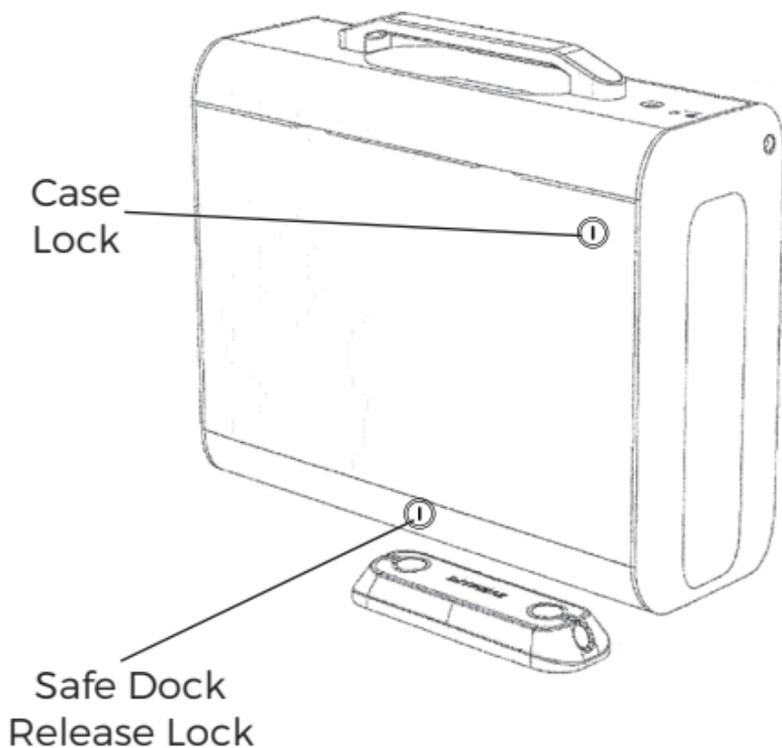

High Quality,
6 Pin Eurocylinder
Locks Case & Safe Dock



Hard Case with Safe Dock Release

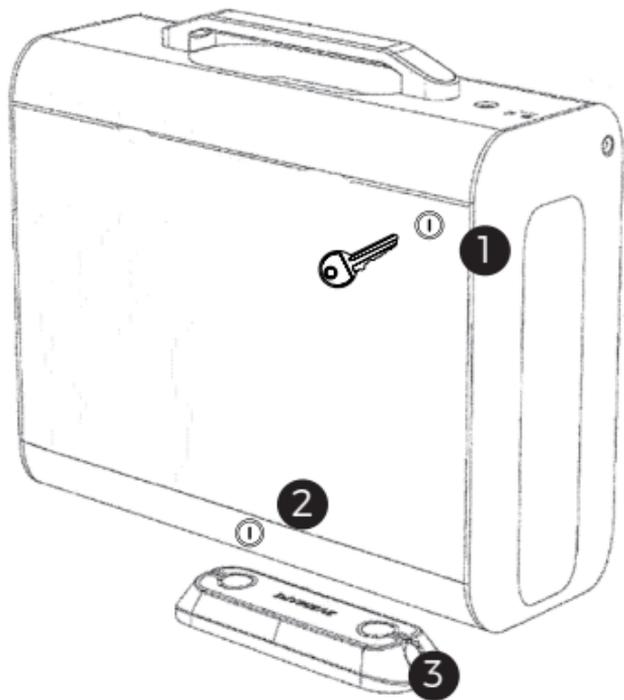


- 1 Eurocylinder, use key to open case
- 2 Keyed Dock Release
 1. Insert Key
 2. Turn key to release case from SafeDock
- 3 SafeDock

Secure

- 1 Open the case using key
- 2 Lock case using key
(Case will not self lock)
- 3 Use key to release case from SafeDock

Installing the Safedock



When installing the Safedock use the dock holes as a guide when drilling.

Things you will need

- Drills and drill bits
- Suitable fixings (wood or concrete)

Note

For optimum security it is best to install the Safedock on a level surface

- 1 Drill two pilot holes using the Safedock as a guide marker
- 2 Using the fixings suitable for the surface drill holes and screw your Safedock down

Wood

Fix the Safedock to wooden floors and furniture using standard wood screws (9mm / 3/8 in)

Concrete

Fix to a concrete surface using concrete anchors or screws (9mm / 3/8 in)

Car

When fixing a Safedock to a car we recommend getting the product installed by a professional at a car body shop


Caution

When installing the Safedock ensure there are no pipes, underfloor heating or wires that could get damaged in the process.


Visit the Eversafe website to watch instructional videos on how to install your Safedock

Contents

Hardcase

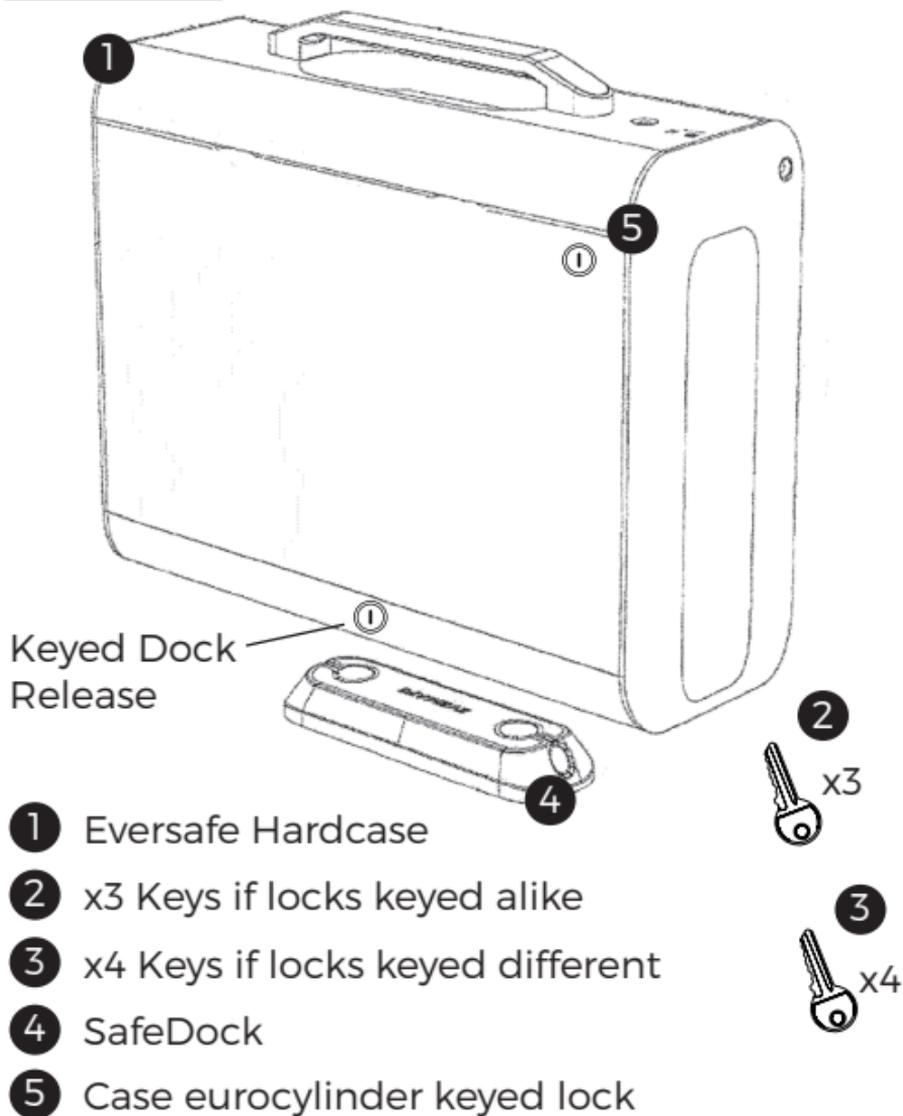


SafeDock

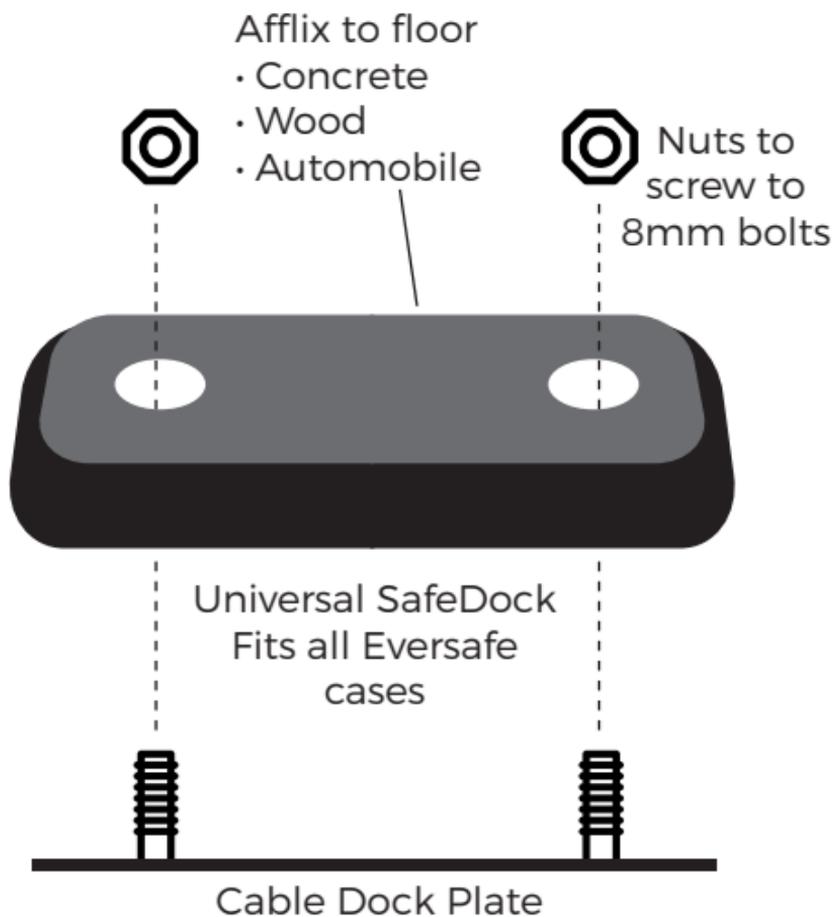

Docking plate is attached to SafeDock using 2 8mm bolts. (assembled at factory - for information only)


Once bag is docked bolts cannot be removed.

How To Dock Case

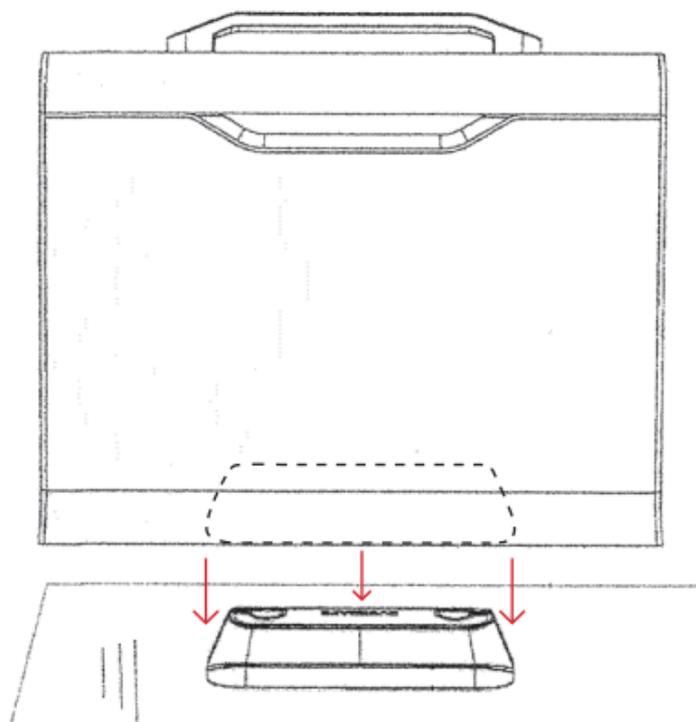

- 1** To lock bag to dock simply drop the bag gently onto the dock and pull to ensure it is engaged. Spring loaded locking pins will self lock
- 2** Mount SafeDock to floor
 - Concrete: Use concrete screws
 - Wood: Use wood screws

To open case use key
in Eurocylinder lock

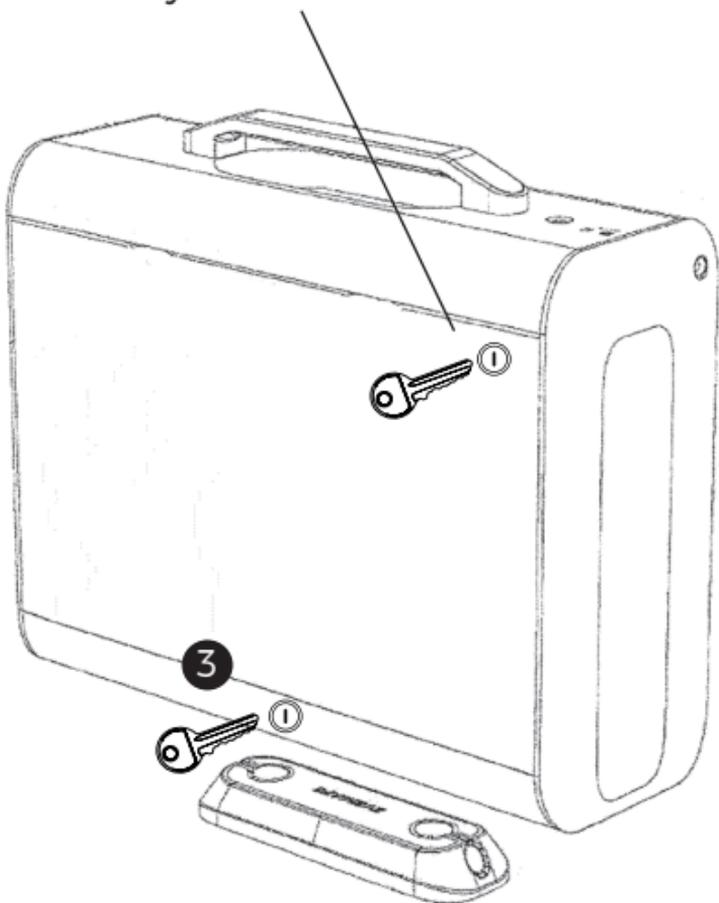


3 To remove case insert key and turn

Cable Dock

Use to secure to fixed object

Cable Dock

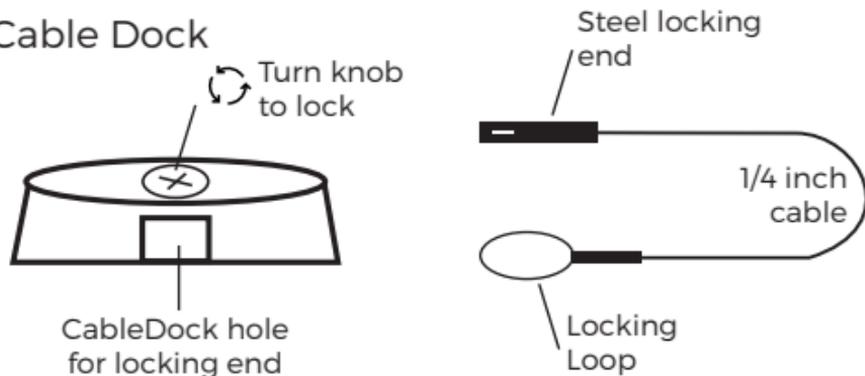

- 1 Wrap cable around fixed object (steering wheel, fixing point if in car) (fence, tree or lamp post if outside)
- 2 Put steel locking end thru cable dock end loop
- 3 Insert cable dock cable locking end into cable dock hole in cable dock
- 4 Turn knob on top of cable dock to lock steel locking end in place
- 5 Drop case onto cable dock
- 6 To release case use keyed dock release

Eversafe Technologies Limited

8 Monaghan Court, Monaghan Street

Newry, Co Down

UK BT35 6BH

Phone UK: +44 7769 552267

Email: info@eversafetech.com

Eversafe USA Inc.

3877 Copper Ridge Ct,

Amelia, OHIO 45102

Phone US: 1-602 390 7044

Email: info@eversafetech.com

www.eversafetech.com